


Flat Pattern Foaming Spray Nozzles

Made-to-Order

AWVV

Flat Spray



- Flat fan spray nozzle for spraying detergent.
- Compressor-free, it generates a large amount of foam using only liquid pressure to draw in air.
- The long-lasting foam helps to increase the cleaning performance.
- The wide spray angle covers a larger cleaning area.

[STANDARD PRESSURE]

0.3 MPa


[APPLICATIONS]

- Cleaning: conveyors, outer surface of vehicles, factory floors/walls

Structure	<ul style="list-style-type: none"> • Made of metal. • Comprises a nozzle tip, cap, adaptor, and strainer.
Material	• S303
Weight	<ul style="list-style-type: none"> • Spray capacity code 10: 60 g • Spray capacity code 30 and 50: 65 g

DRAWING

Unit: mm

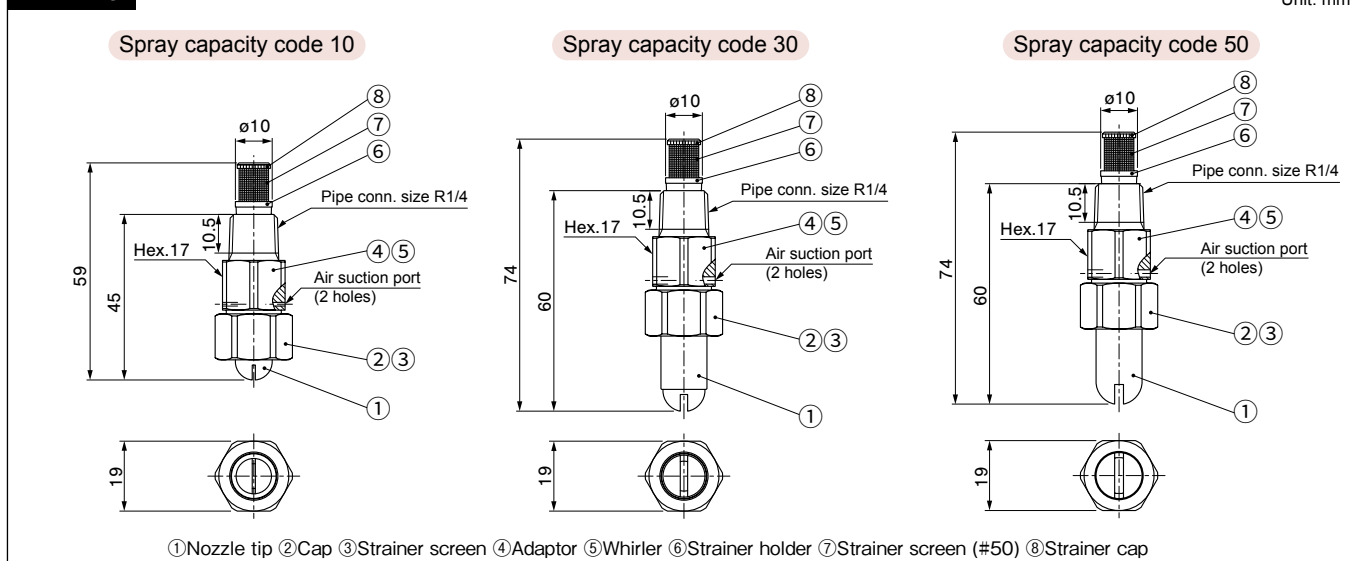

[Note] Appearance and dimensions may differ slightly depending on material and nozzle code.

Spray angle code	Spray capacity code	Liquid	Spray angle ^{*1} (°)			Spray capacity ^{*2} (L/min)						Strainer mesh size
			0.1 MPa	0.3 MPa	0.6 MPa	0.1 MPa	0.2 MPa	0.3 MPa	0.4 MPa	0.5 MPa	0.6 MPa	
100	10	Water	50	105	116	0.58	0.82	1.00	1.15	1.29	1.41	50
		Detergent	55	100	116	0.58	0.82	1.00	1.15	1.29	1.41	50
	30	Water	75	105	113	1.73	2.45	3.00	3.46	3.87	4.24	50
		Detergent	82	100	113	1.73	2.45	3.00	3.46	3.87	4.24	50
	50	Water	75	105	113	2.89	4.08	5.00	5.77	6.45	7.07	50
		Detergent	82	100	113	2.89	4.08	5.00	5.77	6.45	7.07	50
80	10	Water	40	80	100	0.58	0.82	1.00	1.15	1.29	1.41	50
		Detergent	—	80	100	0.58	0.82	1.00	1.15	1.29	1.41	50
	30	Water	57	80	95	1.73	2.45	3.00	3.46	3.87	4.24	50
		Detergent	57	80	95	1.73	2.45	3.00	3.46	3.87	4.24	50
	50	Water	57	80	95	2.89	4.08	5.00	5.77	6.45	7.07	50
		Detergent	57	80	95	2.89	4.08	5.00	5.77	6.45	7.07	50

*1) The spray angle for detergent is for reference only, spraying commercial dishwasher detergent that is diluted by a factor of 100.

"—" indicates a value outside of the operating range.

*2) Spray liquid is tap water. The performance guarantee does not apply when spraying detergent.

HOW TO ORDER

To inquire about or order a specific nozzle please refer to this coding system.

Example: 1/4M AWWV 10010 S303W

1/4M	AWVV	100	10	S303	W
Pipe conn. size ³		Spray angle code	Spray capacity code	Material	Strainer
		100	10		
		80	30		
			50		

*3) "M" indicates male thread ("R" of the ISO standard), e.g. 1/4M = R1/4.

This nozzle series is made-to-order.

ALSO AVAILABLE!

Solid Stream Jet
Foaming Spray Nozzles

**AWCC
SERIES**

See page 110 of this catalog.