


Clog-resistant Fine Fog Nozzles Full Cone Spray

SETOJet-R

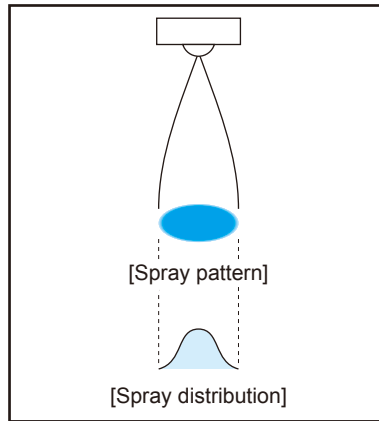


- Full cone spray pneumatic nozzle producing fine atomization with a mean droplet diameter of 40 μm or less.*1
 - Eddies from air makes further fine atomization.
 - Optimal for spraying viscous liquids.
 - External mixing type (designed to mix air and liquid outside the nozzle for atomization).
- *1) Droplet diameter measured by laser Doppler method

APPLICATIONS

- Spraying: Oil, lubricant, mold release agent, honey, aqueous urea, rust preventive, glaze, viscous liquid, slurry

DRAWING

■ Weight: 85 g

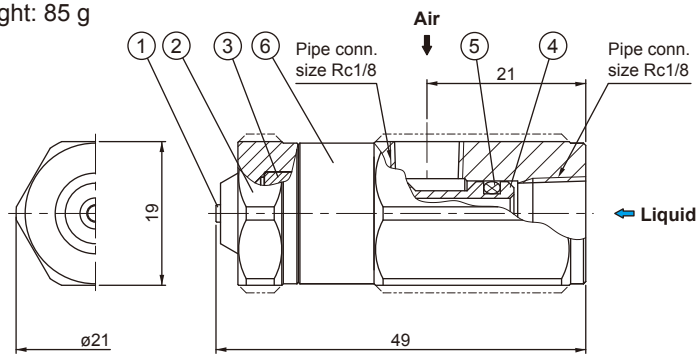

COMPONENTS AND MATERIALS

No.	Components	Standard materials*2
1	Nozzle tip	S303
2	Nozzle body	S303
3	Air balancer	S303
4	Stem	S303
5	O-ring	FKM
6	Adaptor	S303

*2) Optional material: S316L

Unit: mm




Download 3D CAD models (SETOJet-R)


FLOW-RATE DIAGRAMS

■ How to read the chart


1. The spray capacity shown is for one nozzle.
2. Blue lines (—) represent liquid pressures P_w in MPa.
Green lines (—) represent air-water ratio Q_a/Q_w .
3. Measured at 100 mm liquid siphon height with P_w at 0 MPa.
4. Numbers in ovals $\bigcirc$ indicate Sauter mean diameters (μm) measured by laser Doppler method (measured at 300 mm from the nozzle).



SETO0405R

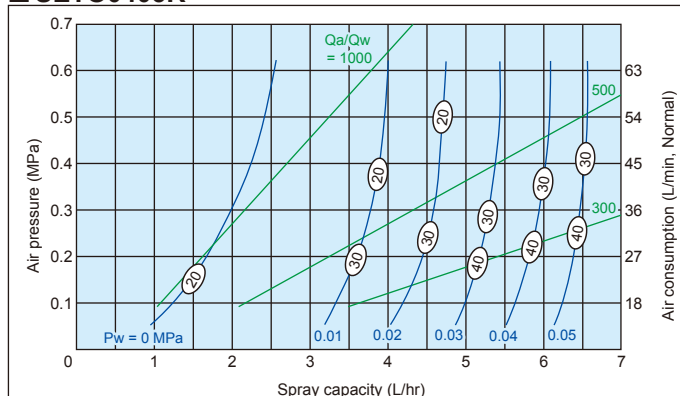


SETO07507R


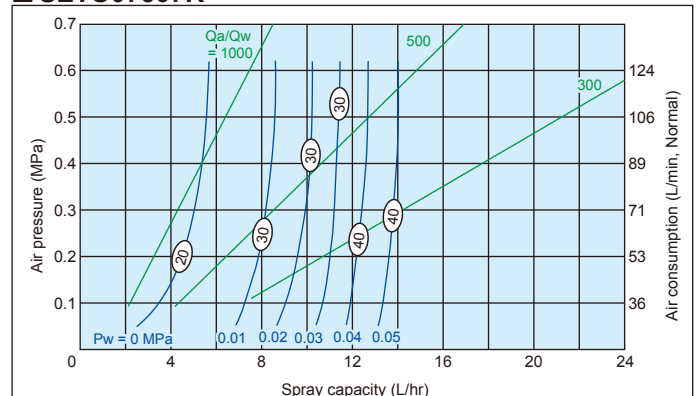


Clog-resistant Full Cone Spray Fine Fog Nozzles SETOJet-R series

■ SETO1510R

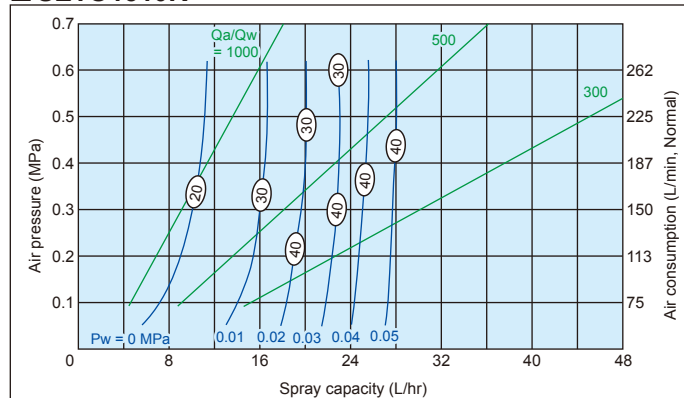

■ SETO2210R

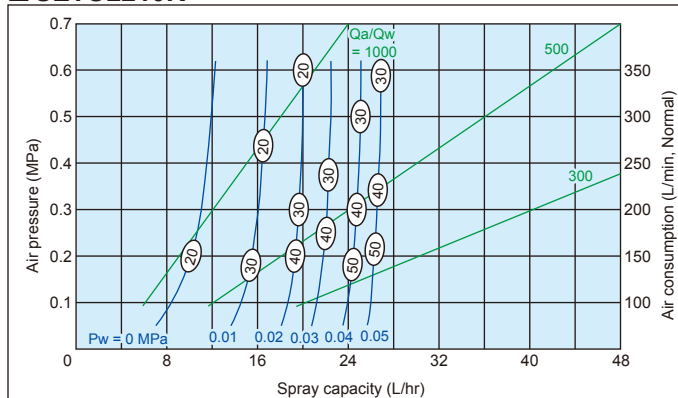

PERFORMANCE DATA

Air consumption code	Spray capacity code	Air pressure (MPa)	Air consumption (L/min, Normal)	Spray capacity (L/hr)		Spray width*4 (mm) H = 500 mm	Mean droplet diameter*4 (μm) Laser Doppler method	Free passage diameter (mm)	
				Liquid pressure (MPa)				Liquid	Air
				0 (Siphon)*3	0.05				
04	05R	0.3	36	2.0	6.5	130	15—40	0.5	0.1
	07R		36	4.0	12.3	130		0.7	0.1
	10R		36	8.0	27.7	130		1.0	0.1
075	07R		71	5.0	13.9	160		0.7	0.2
	10R		71	9.0	27.9	160		1.0	0.2
15	10R		150	10.0	27.7	170		1.0	0.3
22	10R		200	11.0	26.4	180		1.0	0.5

*3) Siphon height: 100 mm.

*4) Measured at compressed air pressure of 0.3 MPa and liquid pressure of 0 MPa (siphon height of 100 mm).

HOW TO ORDER

To inquire about or order a specific product please refer to this coding system.

<Example> SETO 0405R S303 + T S303

SETO

04

Air consumption code

■04

■075

■15

■22

05R

Spray capacity code

■05R

■07R

■10R

S303

Material of nozzle tip

+

T

Type of adaptor

S303

Material of adaptor

Note: Configuration and dimensions may be changed when nozzle tip material is different.